


## TYPE CSK-ALUM BLIND RIVET NUT

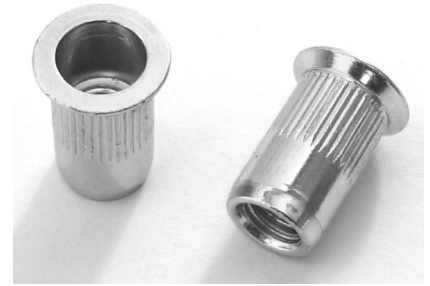

### Countersunk Head Rivet Nuts, Round Knurled Body, Aluminium

Thread Size	Grip Range	Part No	Hole Diameter +0.1 / -0.0	Body Diameter	Head Diameter	Head Thickness	Overall Length
M3	1.5-3.5	CSK3-ALUM	5.0	4.9	7.5	1.5	11.5
M3	3.5-4.5	CSK3-4.5-ALUM	5.0	4.9	7.5	1.5	12.5
M4	1.5-4.0	CSK4-ALUM	6.0	5.9	8.5	1.5	12.5
M4	4.0-5.5	CSK4-5.5-ALUM	6.0	5.9	8.5	1.5	15.0
M5	1.5-4.0	CSK5-ALUM	7.0	6.9	9.5	1.5	13.5
M5	4.0-6.5	CSK5-6.5-ALUM	7.0	6.9	9.5	1.5	16.0
M5	6.5-9.0	CSK5-9.0-ALUM	7.0	6.9	9.5	1.5	18.5
M6	1.5-4.0	CSK6-ALUM	9.0	8.9	11.5	1.5	15.5
M6	4.0-6.5	CSK6-6.5-ALUM	9.0	8.9	11.5	1.5	18.0
M6	6.5-9.0	CSK6-9.0-ALUM	9.0	8.9	11.5	1.5	20.5
M8	1.5-4.0	CSK8-ALUM	11.0	10.9	13.5	1.5	18.5
M8	4.0-6.5	CSK8-6.5-ALUM	11.0	10.9	13.5	1.5	21.0
M8	6.5-9.0	CSK8-9.0-ALUM	11.0	10.9	13.5	1.5	23.5
M10	2.0-4.5	CSK10-ALUM	12.0	11.9	14.5	1.7	21.0
M10	4.5-7.5	CSK10-7.5-ALUM	12.0	11.9	14.5	1.7	24.0
M10	7.5-10.5	CSK10-10.5-ALUM	12.0	11.9	14.5	1.7	27.0
M12	2.0-4.5	CSK12-ALUM	16.0	15.9	19.0	1.9	24.5
M12	4.5-7.5	CSK12-7.5-ALUM	16.0	15.9	19.0	1.9	27.5
M12	7.5-10.5	CSK12-10.5-ALUM	16.0	15.9	19.0	1.9	31.0

The countersunk head style provides a stronger head and will install flush in a countersunk hole.

Dimensions in mm

Unit 3 Sandiacre Road, Stapleford, Nottingham, NG9 8EX

☎ 0800 84 99 112 📧 sales@clinchpartsuk.co.uk

Due to continuous development and improvement, specifications may change without prior notification. Please check before specifying.